

# LINK Quinti®



Operative armchair with mesh backrest by Quinti Sedute collection. The seat, 1IM certified, exceeds the minimum requirements of DL 626/94, and DL.81.

## Base

1. Black polypropylene base "TREND". [d. 680]
2. Polished aluminum base "TREND". [d. 680]

## Castors & feet.

Double-tread nylon castors, with 50mm diameter. Variants: standard or rubberized. Both can be self-braking or can move freely.

## Elevation

All Quinti gas columns are conforming to DIN 4550 norm and exceed the 4° level.

## Mechanics

LINK is created in only one version of mechanism:

**M12** The Synchron Mechanism is available in black steel. It enables the adjustment in height, the synchronized adjustment of the backrest inclination with the anti-shock system, lockable in 4 positions. The rigidity of the oscillation is adjustable using a pommel, under the seat.

## Armrests

Available armrest :

1. Pair of stable black polypropylene armrests.
2. Pair of nylon armrests, adjustable in height.
3. Pair of 3D armrests, with polyurethane pad.


## Seat & backrest

**Seat:** upholstered without seams, with an internal wooden support which is stuffed with non-deformable polyurethane foam, thickness 60mm and density T40

**Backrest.** Available in the standard Gabriel mesh version, and in the sample colours. It is provided with adjustable lumbar support. The structure is made of black polypropylene.



## DIMENSIONS

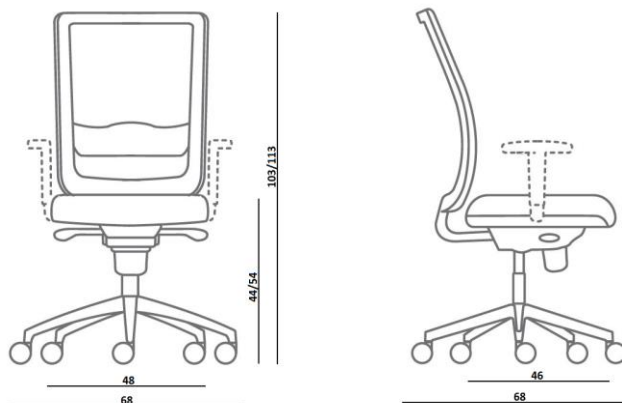

**CREPE'**

**CATEGORY 1**

350 gr/mtl  
100% Polyester Class 1 ,EN1021/1-2  
50.000 +/- 10% Mantidal rubs

**BIO-EXPO**

**CATEGORY 2**

300 gr/mt2  
100% Propitex FR bacteriostatic  
Class 1UNI EN ISO 354:2003  
100.000 +/- 10% Mantidal rubs

**EXTREME**

**CATEGORY 2**

350 gr/mtl  
100% Xtreme FR  
Class , EN 1021-1/2  
100.000 +/- 10% Mantidal rubs

**LASER**

**CATEGORY 2**

560 gr/mtl  
100% Polyester  
FR  
Class 1  
80.000+/- 10% Mantidal rubs

**ECO-LEATHER**

**CATEGORY 2**

630 gr/mt2  
83% PVC, 17% Syntetic  
ISO 379-DIN75200-CSERF4/83 10%  
Mantidal rubs

**ERA**

**CATEGORY 3**

448 gr/mtl  
100% Trevira CS  
Class 1UNI EN ISO 354:2003  
100.000 +/- 10% Mantidal rubs

**LASER PLUS**

**CATEGORY 3**

630 gr/mtl  
100% Polyester FR Trevira  
Class 1 , 4.000 +/- Mantidal rubs

**ECO-LEATHER SOUL**

**CATEGORY 3**

760 gr/mt2  
Surface 100% POLYURETHANE,  
Polyester base 85%,17% Cotton  
E>100.000 EN ISO 5470-2 /1

**MELANGE**

**CATEGORIA 3**

390 g/lin.m  
100% Trevira CS  
Class 1  
80.000 +/- 10% Mantidal rubs

**JET**

**CATEGORY 3**

365+/- 5% g/lin.m  
100% Polyester FR  
Class 1  
80.000+/- 10% Mantidal rubs

**ECO-LEATHER PRO SYSTEM**

**CATEGORY 3**

710 gr/mt2  
Surface 93% PVC  
Polyester Base 28%  
CLASS1  
100.000 rubs

**WOOL**

**CATEGORY 5**

500 gr/mt2  
75% Wool, 25% polyamide  
Class 1  
100.000 Mantidal rubs

**LEATHER**

**CATEGORY 5/6**

620 g/lin.m  
100% Cowhide  
Class 1, EN 1021-1/2

**PIED POULE**

**CATEGORY 6**

550 g/lin.m  
66% cotton, 34% Polyester  
35.000 % Mantidal rubs

**EUROPOST 2**

**CATEGORY 6**

710 g/lin.m  
63% PU, 16% CO, 21% PL  
Ini1975 CLASS1emme,UNI9175/FA  
50.000% Mantidal rubs

**PREMIUM /ELEGANCE**

**CATEGORY 7**

100% Cowhide First flower  
Thickness1,2/1,4 mm  
EN1021-1/2

**MERIT**

**CATEGORY 7**

500g/lin.m  
76% Recycled Polyester  
24% Polyester  
EN 1021-1/2  
85.000 % Mantidal rubs

**REMIX**

**CATEGORY 7**

415 g/lin.m  
90% New wool worsted, 10% Nylon  
Class 1, EN 1021-1/2  
100.000 % Mantidal rubs

**STEELCUT TRIO**

**CATEGORY 7**

770 g/lin.m  
90% Worsted New wool, 10% Nylon  
Class 1, EN 1021-1/2  
100.000 % Mantidal rubs

**DECONTRACTE' VELVET**

**CATEGORY 7**

590 g/lin.m  
19% CO, 61% PC,10% PL, 10%VI  
40.000 % Mantidal rubs

**VELVET**

**CATEGORY 8**

600 g/lin.m  
100.000 % PL Flame retardant

**SOFT LEATHER**

**CATEGORY 8**

100% Cowhide THICKNESS,8-2 mm  
FIRST FLOWER ANILINE TANNING  
EN1021-1/2

**GABRIEL MESH**

510 gr. gr/mtl  
100% Polyester / Polyester  
BS EN 1021-1:2014  
70.000 / rub

---

In order to have an optimal maintenance of the products and to preserve the characteristics of the materials by which they are made, it is recommended the following course of action.

### **FABRICS**

Cleaning: check the dedicated selection written on the color Swatch card.

Usage: it is recommended to pay careful attention to the fabrics as they can be cut or ripped easily.

### **WOODS**

Cleaning: clean using a soft cloth, soaked in tepid water. Dry always after the cleaning. Remove immediately any liquid substances or other residue in order to prevent the absorption.

Usage: wooden surfaces, being a natural material, might be subjected to color alterations with sun exposure and use over time. It is reminded that wooden surfaces cannot endure direct heat sources.

### **METALS**

Cleaning: both steel and aluminum surfaces, and the painted ones, have to be cleaned using a soft cloth soaked in tepid water. For the most persistent stains it is possible to dilute mild soap with water moderately. Dry always after the cleaning, using a soft cloth of deer-hide. Do not use cleaning products for steel, chlorine, bleach or other strong products. It is not recommended to use abrasive, scourers, which can scratch the metal surfaces.

Usage: pay attention to the food stains as coffee, coke, fruit juices which can make indelible marks on the surfaces.

### **WARRANTY**

QUINTI guarantees the products will maintain their properties for 6 years from delivery, except normal usury and provided that they will be used according to the guidelines given. QUINTI will replace, free of charge, any product found non-compliant with this warranty, without incurring any other liability of sort. Components, external accessories or materials supplied by the buyer and applied to the products in order to customize them will not be supported by the guarantee. For an optimal maintenance of the products and to keep unchanged the characteristics of the materials with which they are made, some simple attentions are necessary.